

□□□□□□□□ □□□□□□□□ □□□□□□□□ □□□□ □□□□

[illegible][illegible]

☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

總厚度	16 吋 20 / 吋
重量	383 磅
厚度	1-6000 吋
材料	鋼板 鋼板 PU 鋼板鋼板鋼板 鋼板
鋼板厚度 鋼板	鋼板厚度 鋼板 鋼板
鋼板厚度 鋼板	HDP,>30um
鋼板厚度 鋼板	3/吋 40 鋼板厚度 鋼板
鋼板厚度 鋼板 鋼板	>95%
鋼板厚度 鋼板	鋼板厚度 鋼板厚度 鋼板厚度 鋼板
鋼板厚度 鋼板 鋼板	0.27 吋
鋼板	ISO9001
鋼板厚度 鋼板 鋼板	鋼板 吋/1
鋼板厚度 鋼板	-/2 吋
鋼板	10 鋼板/吋 8 吋 鋼板/吋
鋼板厚度 鋼板	(0-6000 鋼板 / 吋 10) 吋 170 * 吋 41 * (吋)
鋼板厚度 鋼板	20GP: 1500 (吋 2.8 :鋼板 鋼板) 鋼板 鋼板 40HC/HQ: 3500 .(吋 3.8 :鋼板 鋼板) 鋼板 鋼板 40NOR: 3300 吋 3.8 :鋼板 鋼板) 鋼板 鋼板).
鋼板厚度 鋼板 鋼板	鋼板厚度 鋼板 鋼板 鋼板 鋼板 鋼板 鋼板 鋼板
鋼板	鋼板厚度 鋼板 鋼板
鋼板	鋼板 鋼板 吋/吋 鋼板 鋼板 鋼板 鋼板 鋼板

PRODUCT STRUCTURE



■ Surface Material

Galvalume
Internal and external galvanizing
Cold bending forming of
color steel plate

38.3cm



■ Middle layer material

Polyurethane foam
Insulation partition layer



■ Bottom material

Moisture and heat insulation
Aluminum foil protective layer

1.6cm

□□□□□□□□ □□□□□□ □□□□

Flat series 平面纹



QZ series 七砖纹




TT series 弹涂纹



ZZG series 中直沟



SP series 树皮纹

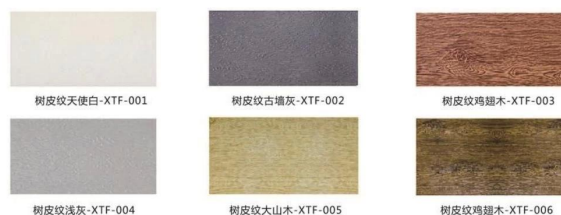

ZXG series 中斜沟




SS series 砖纹双色系列



WHS series 文化石系列



XWL series 小瓦楞纹

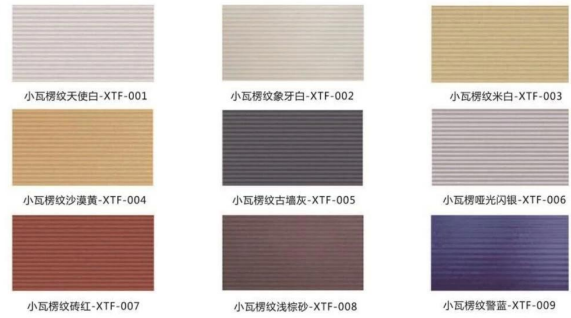

MW series 木纹系列



□□□□□□ □□□□□□ □□□□□□

Aluminum alloy accessories 铝合金配件

	材质: 铝合金 用途: 起步件、窗门口内侧收口件	Texture: Aluminum alloy Function: starting part, binding-off part of inside part of the window, internal-angle part
	材质: 铝合金 用途: 上部收口	Texture: Aluminum alloy Function: binding-off part of top
	材质: 铝合金 用途: 门框包边	Texture: Aluminum alloy Function: base of binding-off part
	材质: 铝合金 用途: 内置起步件	Texture: Aluminum alloy Function: inside starting part
	材质: 铝合金 用途: 板材横向连接	Texture: Aluminum alloy Function: base of board connecting part
	材质: 铝合金 用途: 大阳角、大阳角扣盖	Texture: Aluminum alloy Function: Connecting part
	材质: 铝合金 用途: 阴角底座、阳角扣盖	Texture: Aluminum alloy Function: exterior corner cap or interior corner base
	材质: 铝合金 用途: 阴角扣盖、阳角底座	Texture: Aluminum alloy Function: exterior corner base or interior corner cap
	材质: 同材质+镀锌轻钢 用途: 同质阳角件	Texture: homogeneity +Galvanized light steel Function: homogeneous positive corner parts
	材质: 同材质+镀锌轻钢 用途: 同质阴角件	Texture: homogeneity +Galvanized light steel Function: internal corner fittings
	材质: 同材质+镀锌轻钢 用途: 同质中缝条	Texture: homogeneity +Galvanized light steel Function: base of board connecting part

Application cases 应用案例



Application cases 应用案例



Application cases 应用案例



防火




防火性能卓越

鑫特福产品采用防火材料，具有优异的防火性能。在火灾发生时，能够有效阻止火势蔓延，保护人员和财产安全。产品经过严格的防火测试，符合相关标准。鑫特福产品广泛应用于各种建筑，特别是高层住宅和商业建筑。其防火性能得到了广泛认可和好评。鑫特福产品是您防火安全的最佳选择。



性价比高

鑫特福产品不仅具有优异的防火性能，而且价格低廉，性价比极高。产品采用先进的生产工艺，降低了生产成本，使得产品更具竞争力。鑫特福产品广泛应用于各种建筑，特别是高层住宅和商业建筑。其性价比得到了广泛认可和好评。鑫特福产品是您防火安全的最佳选择。

[illegible]