



Ground floor

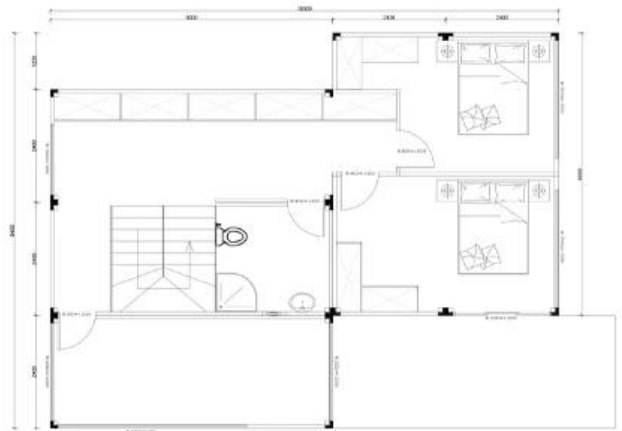

First floor

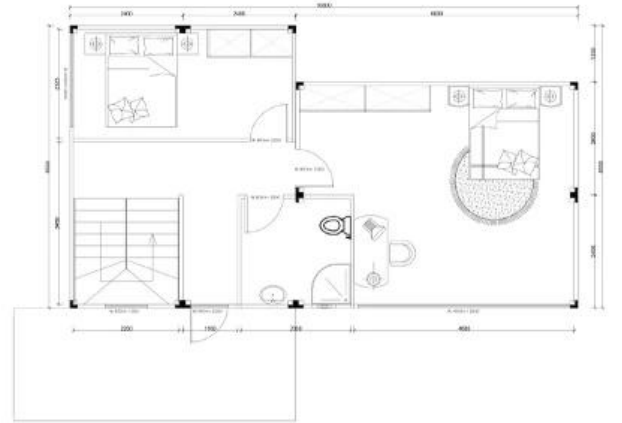

Second floor



BREAKDOWN QUOTATION SHEET

PROJECT		6000mm*2400mm*2896mm combined modular container			
NO.	NAME	DESCRIPTION	SIZE	QTY	UNIT
□ BASIC ITEM				9	set
1	Roof	color steel buckle plate	0.5mm	9	set
		glasswool insulation			
		galvanized steel keel			
		white metal ceiling	0.3mm		
2	Floor	vinyl leather flooring	1.6mm	9	set
		cement fiber board	1.8mm		
		PE insulation film			
		galvanized steel keel			
3	Column	glvanized steel column	L2580mm	36	pc
4	Drain pipe	Rain drain pipes	white pvc pipe	36	pc
□ INCREASE ITEM					
5	Wall panel	75mm Glasswool sandwich panel		281.7	□
6	Exterior wall decoration	Hanging board		191.4	□
7	Pergola	Anticorrosive decoration wood		0	m
8	Decking	WPC		43.2	□
9	Guardrail			25.2	□

10	Stair			1	set
11	Window	Aluminium-alloy window		38	□
12	Door	white steel door	800mm*2000mm	5	set
		Aluminium-alloy door		14.6	□
		change into local standard		9	set
13	Electric system	Led light		12	pc
		switch		12	pc
		socket		15	pc
14	Water system	inlet & outlet water pipes		28.05	□
		PVC cover skirting		9	set
		Connection	module connection lock	38	set
			module top and column connection part covering	105.6	m
15	Assemble Accessories	Molding covering	module floor connection partcovering	39.6	m
		sealing tape	rubber tape filling between module connection part	72.6	m
		Self-glue tape	waterproof self glue tape between module connection part	67.8	m
		shower			set
		toilet			set
16	Facilities(option)	basin			set
		bed			set
		table			set
		wardrobe			set
Total Amount (Necessary Basic Fitting)					
15	Inland Cost		40HC container loading	2	pcs
			20GP container loading	0	pcs
16	Workers loading Cost		40ft/20ft container	2	pcs
TOTAL AMOUNT(EXW PRICE)-					