


□□□□□□ □□□□□□ □□□□ □□□□ □□□□ **1** □□□□□□

□□> □□□□□□ □□□: p>



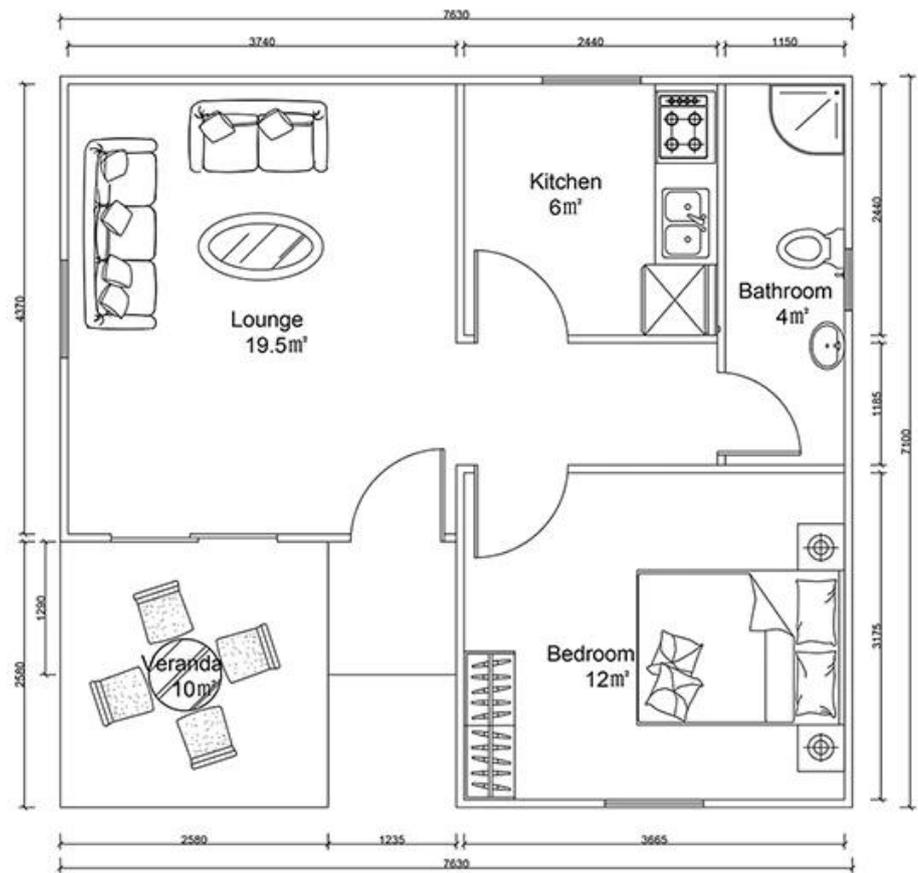

## QUOTATION SHEET

NO.	HY-S01	DATE	
Item	Description	Qty	Unit
<b>Steel frame</b>	Beam HN200*100\HN250*125\square tube120x5mm	54.5	m2
<b>Exterior Wall</b>	90mm ASA Sandwich Panel/90mm ASA	129	m2
<b>Interior Wall</b>	90mm ASA Sandwich Panel/90mm ASA	36.75	m2
<b>Roof</b>	90mm ASA Sandwich Panel/90mm	96	m2
	asphalt shingles	96	m2
<b>Door</b>	Out door (Steel door)/900*2000mm	1	pcs
	Inside door(MDF door)/800*2000mm	2	pcs
	Aluminium-alloy glass door	3.2	m2
	bathroom door/PVC800mm x 2000mm(water proof)	1	pcs
<b>Windows</b>	PVC sliding window /PVC950(W)*1000mm(H)	3	pcs
	PVC sliding window /PVC950(W)*600mm(H)	1	pcs
<b>Accessories</b>	kinds of necessary screws\U type clipsealant\Special binder	54.5	m2
<b>Ceiling</b>	PVC strip ceiling/PVC	54.5	m2
<b>Floor</b>	ceramic tile/ 800x800mm	54.5	m2
<b>Drain system</b>	drain pipes \gutter	38	m
<b>EXW COST</b>		<b>\$10,699.50</b>	
<b>Inland Cost</b>	40HC container loading	1	pcs
	20GP container loading	0	pcs
<b>Workers loading Cost</b>	40ft/20ft container	1	pcs
<b>Total Amount /(FOB Qingdao)</b>		<b>\$11,649.50</b>	