


Heya -S02

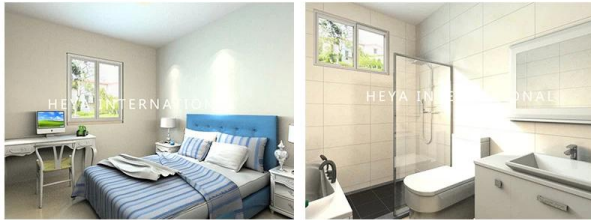

QUOTATION SHEET

NO.	HY-S02	DATE	
Item	Description	Qty	Unit
Steel frame	Beam HN200*100\HN250*125\square tube120x5mm	40	m2
Exterior Wall	90mm ASA Sandwich Panel\90mm ASA	85.8	m2
Interior Wall	90mm ASA Sandwich Panel\90mm ASA	24	m2
Roof	90mm ASA Sandwich Panel\90mm	66.5	m2
	asphalt shingles	66.5	m2
Door	Out door (Steel door)\900*2000mm	1	pcs
	Inside door(MDF door)\800*2000mm	1	pcs
	bathroom door\PVC800mm x 2000mm(water proof)	1	pcs
Windows	PVC sliding window /PVC950(W)*1000mm(H)	3	pcs
	PVC sliding window /PVC950(W)*600mm(H)	1	pcs
Accessories	kinds of necessary screws\U type clipsealant\Special binder	40	m2
Ceiling	PVC strip ceiling\PVC	40	m2
Floor	ceramic tile/ 800x800mm	40	m2
Drain system	drain pipes \gutter	21	m
EXW COST		\$7,285.10	
Inland Cost	40HC container loading	1	pcs
	20GP container loading	0	pcs
Workers loading Cost	40ft/20ft container	1	pcs
Total Amount (FOB Qingdao)		\$8,235.10	