□□□□□□□ □□□

Heya-2S07

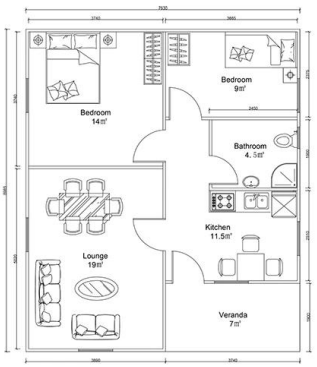



QUOTATION SHEET							
NO.	Heya-2S07					DATE	
NO	ITEM	DESCRIPTION	UNIT	THEORY QTY	LOSS RATE	UNIT	ACTUAL QTY
Frame System							
1	Steel structure		㎡	69.00	1.00	T	2.76
2	Fittings		set	69.00	1.00	㎡	69.00
Wall System							
3	External wall foamed cement board	610*2270*T90mm	㎡	129.00	1.10	pc	103.00
4	Internal wall foamed cement board	610*2270*T60mm	㎡	53.38	1.10	pc	43.00
Roof System							
5	Roof panel	75mm EPS sandwich panel	n	94.32	1.10	m	103.75
Door & Window System							
7	PVC window		㎡	7.98	1.00	㎡	7.98
8	PVC door		㎡	9.00	1.00	㎡	9.00
Decoration System							
9	Ceiling	gypsum board,600*600mm 10pcs/pack	㎡	69.00	1.10	pack	8.00
10	Floor tile	ceramic tile 600*600mm 10pcs/pack	㎡	69.00	1.10	pack	8.00
11	Internal Putty	Brand:Nippon 15kgs/bag	㎡	235.76	1.10	bag	18.00
12	Internal wall coating	white,18L/bucket	㎡	235.76	1.10	bucket	3.00
13	External wall coating	16L/bucket	㎡	129.00	1.10	bucket	2.00
Water&Electric System							
14	Drain pipes ,gutter		n	43.00	1.00	m	43.00
15	Water Pipes	inlet & outlet pipes	㎡	69.00	1.00	㎡	69.00
16	Electric system	Include weak current,exclude socket/switch/light,etc	㎡	69.00	1.00	㎡	69.00
Hardware Accessories System							
17	Hardware Accessories System		㎡	69.00	1.00	㎡	69.00
Fitting facilities							
18	Toilet		pc	0.00	1.00	pc	0.00
19	Basin		pc	0.00	1.00	pc	0.00
20	Shower		pc	0.00	1.00	pc	0.00
21	Kitchen Cabinet		m	0.00	1.00	m	0.00
Inland Transportation							
22	Inland cost	loading fee,truck transport,custom declare,port charges,etc.	nos				1.00
TOTAL PRICE (FOB Qingdao)			**$12,588.64**				