





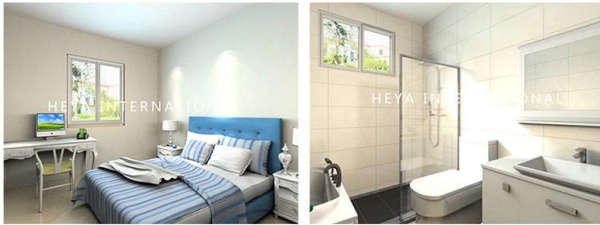

## Heya-3S01

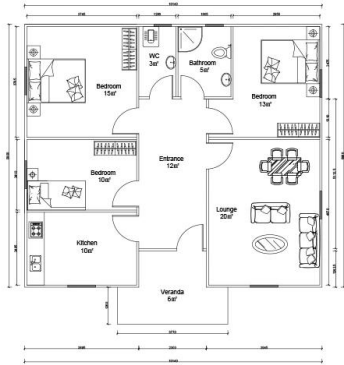

### QUOTATION SHEET

NO.	HY-3S01	DATE	
Item	Description	Qty	Unit
Steel frame	Beam HN200*100/HN250*125/square tube120x5mm	95	m'
Exterior Wall	90mm ASA Sandwich Panel/90mm ASA	166.82	m'
Interior Wall	90mm ASA Sandwich Panel/90mm ASA	95.76	m'
Roof	90mm ASA Sandwich Panel/90mm	116	m'
	asphalt shingles	116	m'
Door	Out door (Steel door)/900*2000mm	1	pcs
	Inside door(MDF door)/800*2000mm	6	pcs
	bathroom door/PVC800mm x 2000mm(water proof)	1	pcs
Windows	PVC sliding window /PVC950(W)*1000mm(H)	6	pcs
	PVC sliding window /PVC950(W)*600mm(H)	2	pcs
Accessories	kinds of necessary screws/U type clipsealant\Special binder	95	m'
Ceiling	PVC strip ceiling/PVC	95	m'
Floor	ceramic tile/ 800x800mm	95	m'
Drain system	drain pipes \gutter	33	m
<b>EXW COST</b>		<b>\$16,093.10</b>	
Inland Cost	40HC container loading	1	pcs
	20GP container loading	0	pcs
Workers loading Cost	40R/20ft container	1	pcs
<b>Total Amount /(FOB Qingdao)</b>		<b>\$17,043.10</b>	

