


**Descrizione del prodotto**

## Heya-2S03

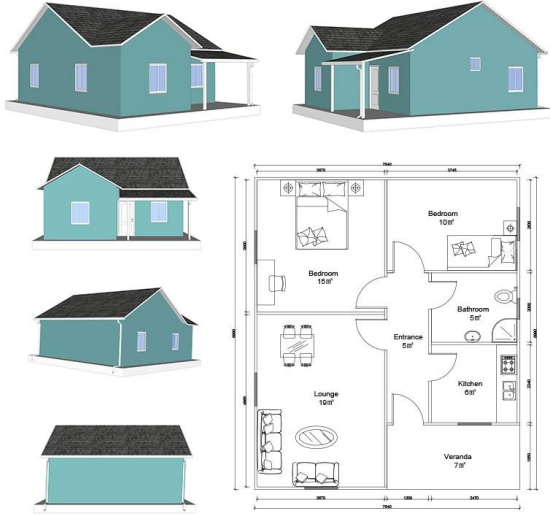

| QUOTATION SHEET            |                                                             |             |      |
|----------------------------|-------------------------------------------------------------|-------------|------|
| NO.                        | HY-2S03                                                     | DATE        |      |
| Item                       | Description                                                 | Qty         | Unit |
| Steel frame                | Beam HN200*100\HN250*125\square tube120x6mm                 | 68          | m2   |
| Exterior Wall              | 90mm ASA Sandwich Panel/90mm ASA                            | 114         | m2   |
| Interior Wall              | 90mm ASA Sandwich Panel/90mm ASA                            | 59.598      | m2   |
| Roof                       | 90mm ASA Sandwich Panel/91mm                                | 96.6        | m2   |
|                            | asphalt shingles                                            | 96.6        | m2   |
| Door                       | Out door (Steel door)/900*2001mm                            | 1           | pcs  |
|                            | Inside door(MDF door)/800*2001mm                            | 4           | pcs  |
|                            | bathroom door/PVC800mm x 2001mm(water proof)                | 1           | pcs  |
| Windows                    | PVC sliding window /PVC950(W)*200mm(H)                      | 5           | pcs  |
|                            | PVC sliding window /PVC950(W)*200mm(H)                      | 1           | pcs  |
| Accessories                | kinds of necessary screws/U type clipsealant\Special binder | 68          | m2   |
| Ceiling                    | PVC strip ceiling/PVC                                       | 68          | m2   |
| Floor                      | ceramic tile/ 800x801mm                                     | 68          | m2   |
| Drain system               | drain pipes \gutter                                         | 32.4        | m    |
| EXW COST                   |                                                             | \$11,756.57 |      |
| Inland Cost                | 41HC container loading                                      | 1           | pcs  |
|                            | 21GP container loading                                      | 0           | pcs  |
| Workers loading Cost       | 40ft/21ft container                                         | 1           | pcs  |
| Total Amount (FOB Qingdao) |                                                             | \$12,706.57 |      |