



Heya-3S01



QUOTATION SHEET			
NO.	HY-3S01	DATE	
Item	Description	Qty	Unit
Steel frame	Beam HN200*100\HN250*125\square tube120x5mm	95	m'
Exterior Wall	90mm ASA Sandwich Panel\90mm ASA	166.82	m'
Interior Wall	90mm ASA Sandwich Panel\90mm ASA	95.76	m'
Roof	90mm ASA Sandwich Panel\90mm	116	m'
	asphalt shingles	116	m'
Door	Out door (Steel door)\900*2000mm	1	pcs
	Inside door(MDF door)\800*2000mm	6	pcs
	bathroom door/PVC800mm x 2000mm(water proof)	1	pcs
Windows	PVC sliding window /PVC950(W)*1000mm(H)	6	pcs
	PVC sliding window /PVC950(W)*600mm(H)	2	pcs
Accessories	kinds of necessary screws\U type clipseakut\Special binder	95	m'
Ceiling	PVC strip ceiling/PVC	95	m'
Floor	ceramic tile/ 800x800mm	95	m'
Drain system	drain pipes \gutter	33	m
EXW COST		\$16,093.10	
Inland Cost	40HC container loading	1	pcs
	20GP container loading	0	pcs
Workers loading Cost	40ft/20ft container	1	pcs
Total Amount /(FOB Qingdao)		\$17,043.10	

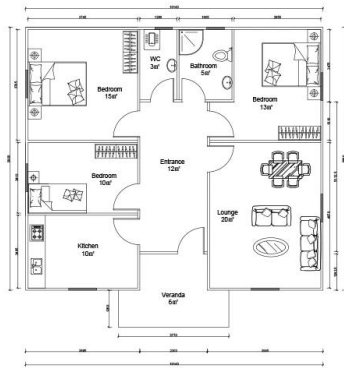