


HY-P17

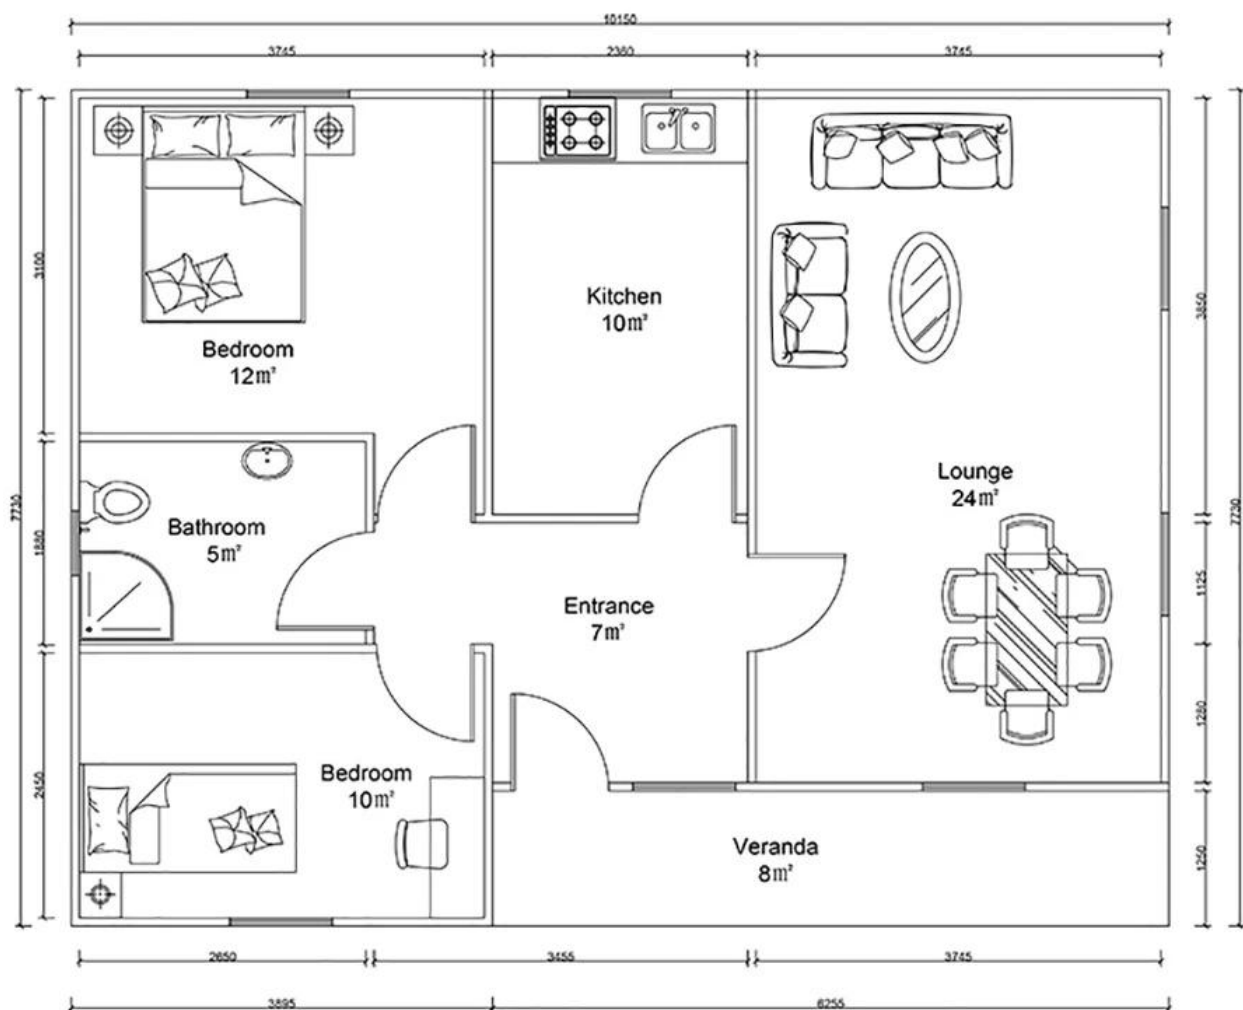

BREAKDOWN QUOTATION SHEET

NO.	HY-QS-ROB-180518	DATE	
PROJECT			
Item	Description	Qty	Unit
Steel frame	C-type steel purlin and beam, square tube, steel channels	78.5	□
Exterior Wall	75mm EPS Color Steel Sandwich Panel, pre-cut, with film protection	138.9	m
Interior Wall	75mm EPS Color Steel Sandwich Panel, pre-cut, with film protection	78	m
Roof	75mm EPS Color Steel Sandwich Panel, pre-cut, with film protection	103.2	m
Ceiling	PVC ceiling/pvc	78.5	□
	Gypsum board 600*600mm		□
	Fiber cement board		□
Base/Foundation	Plywood board		□
	PVC leather floor		□
Floor	Ceramic tile 800x800mm	78.5	□
Roof decoration	Asphalt tile	92.45	□
External Wall decoration	Metal carved plate		□
	PVC hanging board/PVC	123.6	□
	Out door (Steel door) 900*2000mm	1	pcs
Door	Inside door MDF 800*2000mm/MDF		pcs
	Aluminium-alloy glass door		□
	PVC glass door		□
	Bathroom door 800mm x 2000mm (water proof) /PVC	5	pcs
Windows	PVC sliding window 950(W)*1000mm(H)	7	pcs
	PVC sliding window 950(W)*600mm(H)	1	pcs
	Aluminium-alloy window		pcs
Drain system	Drain pipes ,gutter	36.5	m
Electric system		78	□
Accessories	Kinds of necessary screws, sealant, ridge tile, packet eaves, flashing, channel iron	78	□