
## **Product Photo**







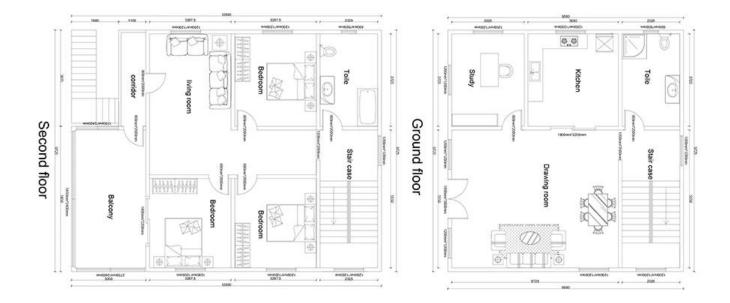

## Product Detail

Inner length / external length5.81m / 6.06m Length Width Inner width/external width2.188/2.438m Height Inner height/external height2.410m/2.591m Main structure Light steel Outside is 0.4mm color steel as the surface, middle is 100mm glass wool Roof insulation. Permitted live loading 0.75KN/m<sup>2</sup> 50mm /75mm /100mm glass wool / rock wool sandwich panel, 0.4mm color g Wall steel sheet and 50kg/m3 glass wool density inside. External wainscot is 0.3mm galvanized steel sheet metal, and insulation is glass wool / rock wool. The supporting material is 18mm cement Magnesium **Base** Fibreboard and the inside decoration is 1.6mm PVC flooring. Permitted loading 2 KN/m2 **Window** PVC sliding/casement window or Aluminum Window Sandwich Panel door or Steel security door or glass door, furnished with Door lock. Option Electric Provided plan, design and construction system Technical water proof, Sound proof, fire prevention and moisture proof parameter

**Detail** 

Item

i g h

e t