
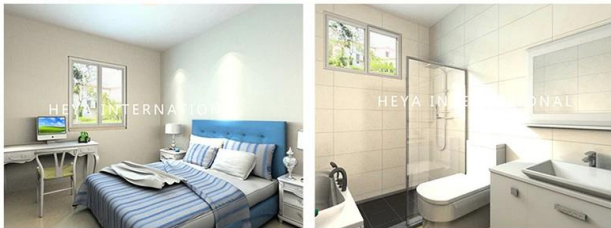
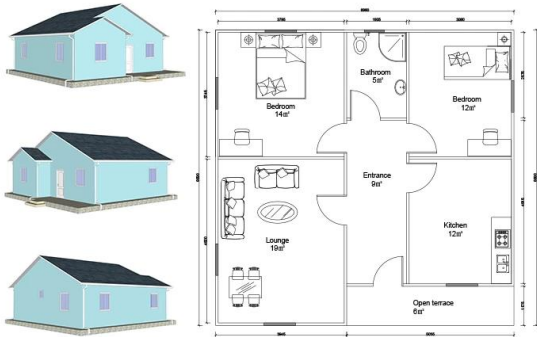


Descrição do Produto

Heya-2S04

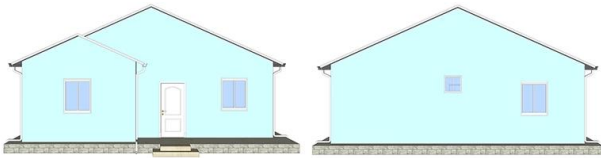

QUOTATION SHEET				
NO.	HY-2S04		DATE	
Item	Description	Qty	Unit	
Steel frame	Beam HN200*100\HN250*125\square tube120x5mm	74	m ²	
Exterior Wall	90mm ASA Sandwich Panel\90mm ASA	135.128	m ²	
Interior Wall	90mm ASA Sandwich Panel\90mm ASA	67.578	m ²	
Roof	90mm ASA Sandwich Panel\90mm	90.05	m ²	
	asphalt shingles	90.05	m ²	
Door	Out door (Steel door)\900*2000mm	1	pcs	
	Inside door(MDF door)\800*2000mm	4	pcs	
	bathroom door\PVC800mm x 2000mm(water proof)	1	pcs	
Windows	PVC sliding window /PVC950(W)*1000mm(H)	6	pcs	
	PVC sliding window /PVC950(W)*600mm(H)	1	pcs	
Accessories	kinds of necessary screws\U type clipsealant\Special binder	74	m ²	
Ceiling	PVC strip ceiling\PVC	74	m ²	
Floor	ceramic tile/ 800x800mm	74	m ²	
Drain system	drain pipes \gutter	33	m	
EXW COST		\$12,597.67		
Inland Cost	40HC container loading	1	pcs	
	20GP container loading	0	pcs	
Workers loading Cost	40ft\20ft container	1	pcs	
Total Amount /(FOB Qingdao)		\$13,547.67		