
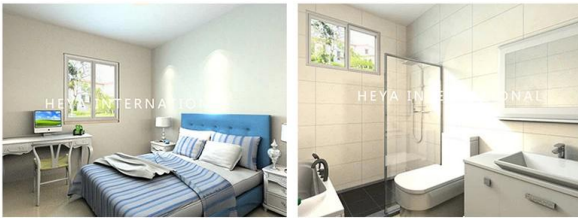


□□□□□□□□□□□□□□

Heya-2B01-B

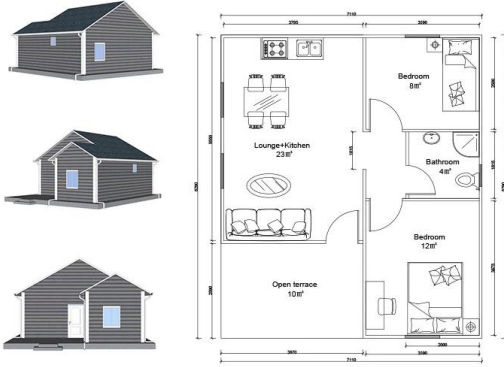

BREAKDOWN QUOTATION SHEET

NO.	HY-2B01-B	DATE	
Item	Description	Qty	Unit
Steel frame	C-type steel purlin and beam, square tube, steel channels	49	m2
Exterior Wall	75mm EPS Color Steel Sandwich Panel, pre-cut, with film protection	114	m
Interior Wall	75mm EPS Color Steel Sandwich Panel, pre-cut, with film protection	39.2	m
Roof	75mm EPS Color Steel Sandwich Panel, pre-cut, with film protection	66	m
Ceiling	PVC ceiling	49	m2
Floor	Ceramic tile 800x800mm	49	m2
Roof decoration	Asphalt tile	59.6	m2
External Wall decoration	Metal carved plate	111.5	m2
Door	Out door (Steel door) 900*2000mm	1	pcs
	Bathroom door 800mm x 2000mm (water proof)	3	pcs
Windows	PVC sliding window 950(W)*1000mm(H)	5	pcs
	PVC sliding window 950(W)*600mm(H)	1	pcs
Drain system	Drain pipes ,gutter	33	m
Electric system		49	m2
Accessories	Kinds of necessary screws, sealant, ridge tile, packet leaves, flashing, channel iron	49	m2
Total Amount (Necessary Basic Fitting)		S7,307.30	
Inland Cost	40HC container loading	1	pcs
Workers loading Cost	40ft/20ft container	1	pcs
Total Amount		S8,257.30	



