


□□□□□□□□□□□□□□□□

Heya-2B03-B



BREAKDOWN QUOTATION SHEET			
NO.	HY-2B03-B	DATE	
Item	Description	Qty	Unit
Steel frame	C-type steel purlin and beam, square tube, steel channels	68	m2
Exterior Wall	75mm EPS Color Steel Sandwich Panel, pre-cut, with film protection	120	m
Interior Wall	75mm EPS Color Steel Sandwich Panel, pre-cut, with film protection	67.2	m
Roof	75mm EPS Color Steel Sandwich Panel, pre-cut, with film protection	108.5	m
Ceiling	PVC ceiling	68	m2
Floor	Ceramic tile 800x801mm	68	m2
Roof decoration	Asphalt tile	96.6	m2
External Wall decoration	Metal carved plate	126	m2
Door	Out door (Steel door) 900*2001mm	1	pcs
	Bathroom door 800mm x 2001mm (water proof)	5	pcs
Windows	PVC sliding window 950(W)*200mm(H)	5	pcs
	PVC sliding window 950(W)*200mm(H)	1	pcs
Drain system	Drain pipes ,gutter	32.4	m
Electric system		68	m2
Accessories	Kinds of necessary screws, sealant, ridge tile, packet eaves, flashing, channel iron	68	m2
Total Amount (Necessary Basic Fitting)		\$9,576.80	
Inland Cost	41HC container loading	1	pcs
Workers loading Cost	40ft/21ft container	1	pcs
Total Amount		\$10,526.80	

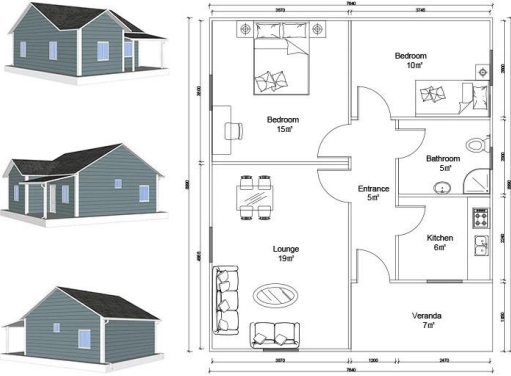

