Описание товара

Heya-3S03





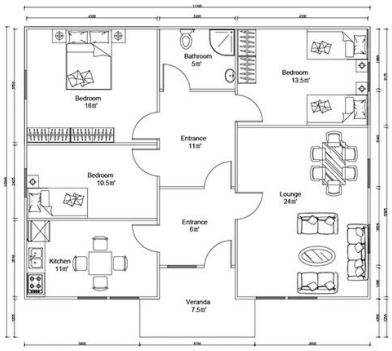

QUOTATION SHEET							
NO.	Heya-3S03					DATE	
NO	ITEM	DESCRIPTION	UNIT	THEORY QTY	LOSS RATE	UNIT	ACTUAL QTY
Frame System							
1	Steel structure		m^2	107.00	1.00	T	4.28
2	Fittings		set	107.00	1.00	m^2	107.00
Wall System							
3	External wall foamed cement board	610*2270*T90mm	m^2	127.00	1.10	pc	101.00
4	Internal wall foamed cement board	610*2270*T60mm	m^2	100.00	1.10	pc	80.00
Roof System							
5	Roof panel	75mm EPS sandwich panel	m	239.20	1.10	m	263.12
Door & Window System							
7	PVC window		m^2	12.54	1.00	m^2	12.54
8	PVC door		m^2	14.40	1.00	m^2	14.40
Decoration System							
9	Ceiling	gypsum board,600*600mm 10pcs/pack	m^2	107.00	1.10	pack	12.00
10	Floor tile	ceramic tile 600*600mm 10pcs/pack	m^2	107.00	1.10	pack	12.00
11	Internal Putty	Brand:Nippon 15kgs/bag	m^2	327.00	1.10	bag	24.00
12	Internal wall coating	white,18L/bucket	m^2	327.00	1.10	bucket	4.00
13	External wall coating	16L/bucket	m^2	127.00	1.10	bucket	2.00
Water&Electric System							
14	Drain pipes ,gutter		m	43.00	1.00	m	43.00
15	Water Pipes	inlet & outlet pipes	m^2	107.00	1.00	m^2	107.00
16	Electric system	include weak current,exclude socket/switch/light,etc	m^2	107.00	1.00	m^2	107.00
Hardware Accessories System							
17	Hardware Accessories System		m^2	107.00	1.00	m^2	107.00
Fitting facilities							
18	Toilet		pc	0.00	1.00	pc	0.00
19	Basin		pc	0.00	1.00	pc	0.00
20	Shower		pc	0.00	1.00	pc	0.00
21	Kitchen Cabinet		m	0.00	1.00	m	0.00
Inland Transportation							
22	Inland cost	loading fee,truck transport,custom declare,port charges,etc.	nos				1.00
TOTAL PRICE (FOB Qingdao)			**$18,484.93**				