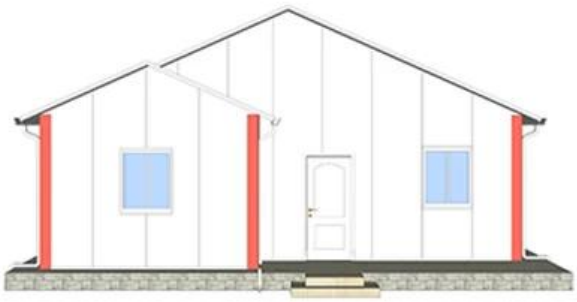

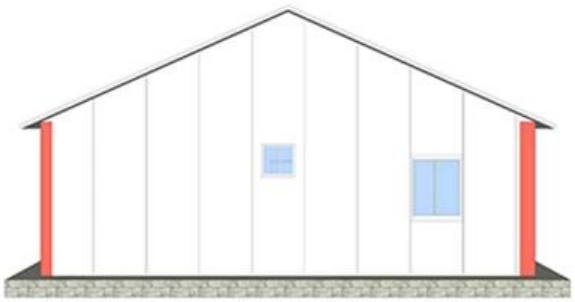

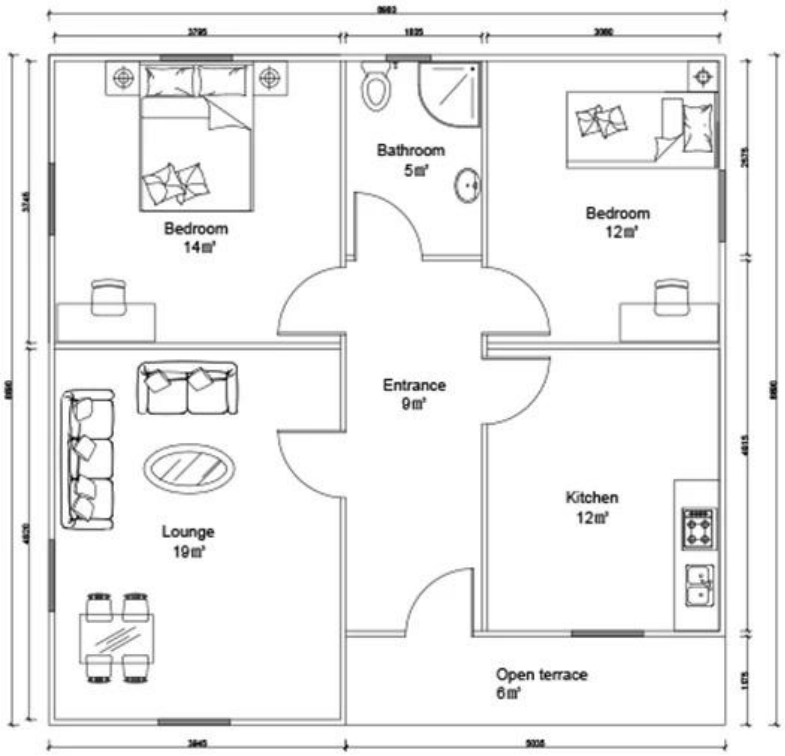

BREAKDOWN QUOTATION SHEET

NO.	HY-2B04-A	DATE	
Item	Description	Qty	Unit
Steel frame	C-type steel purlin and beam, square tube,steel channels	74	□
Exterior Wall	75mm EPS Color Steel Sandwich Panel,pre-cut,with film protection	152	m
Interior Wall	75mm EPS Color Steel Sandwich Panel,pre-cut,with film protection	75.6	m
Roof	75mm EPS Color Steel Sandwich Panel,pre-cut,with film protection	99.4	m
Ceiling	PVC ceiling/pvc	74	□
Floor	Ceramic tile 800x800mm	74	□
Door/□	Out door (Steel door) 900*2000mm	1	pcs
	Bathroom door 800mm x 2000mm (water proof)	5	pcs
Windows	PVC sliding window 950(W)*1000mm(H)	6	pcs
	PVC sliding window 950(W)*600mm(H)	1	pcs
Drain system	Drain pipes, gutter	33	m

Electric system		74	
Accessories	Kinds of necessary screws, sealant, ridge tile, packet eaves, flashing, channel iron	74	