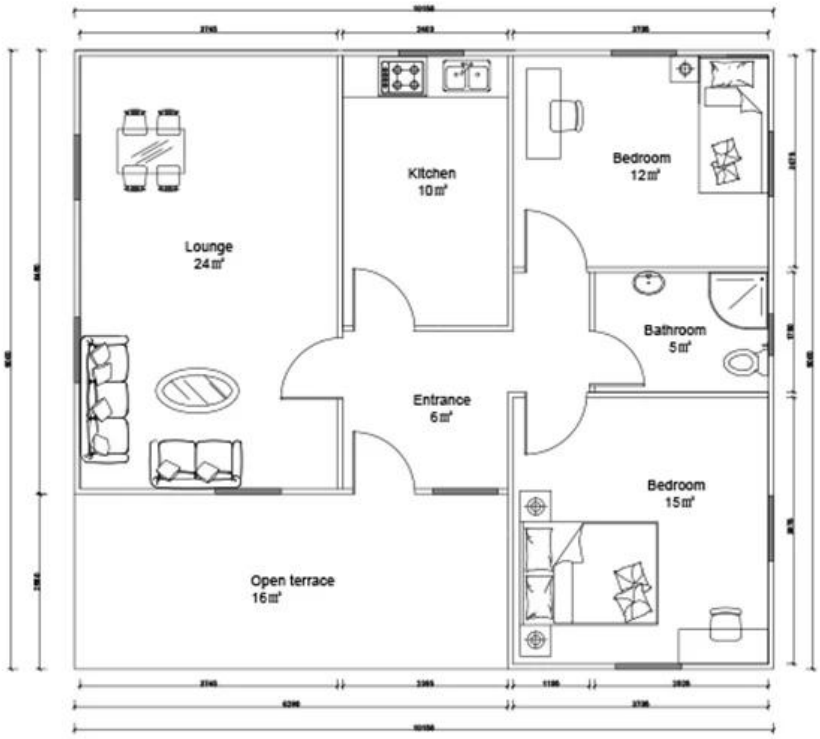

BREAKDOWN QUOTATION SHEET

NO.	HY-2B05-A	DATE	
Item	Description	Qty	Unit
Steel frame	C-type steel purlin and beam, square tube,steel channels	75	□
Exterior Wall	75mm EPS Color Steel Sandwich Panel,pre-cut,with film protection	123	m
Interior Wall	75mm EPS Color Steel Sandwich Panel,pre-cut,with film protection	70	m
Roof	75mm EPS Color Steel Sandwich Panel,pre-cut,with film protection	87.6	m
Ceiling	PVC ceiling/pvc	75	□
Floor	Ceramic tile 800x800mm	75	□
Door/□	Out door (Steel door) 900*2000mm	1	pcs
	Bathroom door 800mm x 2000mm (water proof)	5	pcs
Windows	PVC sliding window 950(W)*1000mm(H)	9	pcs
	PVC sliding window 950(W)*600mm(H)	1	pcs
Drain system	Drain pipes, gutter	38	m
Electric system		75	□

Accessories	Kinds of necessary screws, sealant, ridge tile, packet eaves, flashing, channel iron	75	